

Specification

PRC0510




PRC 0510




Features

- Ultimate slim with 3.4mm luminous surface
- Flexible in a variety of narrow spaces for outlining & decorating
- AL6063-T5 aluminum profile + silicone neon strip making it extremely convenient to install and maintain the light source
- Creative silicone neon strip bringing forth the dot-free, homogeneous and soft light effect
- Applicable to indoor damp environments

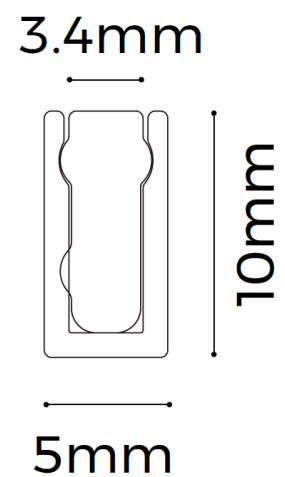

Details

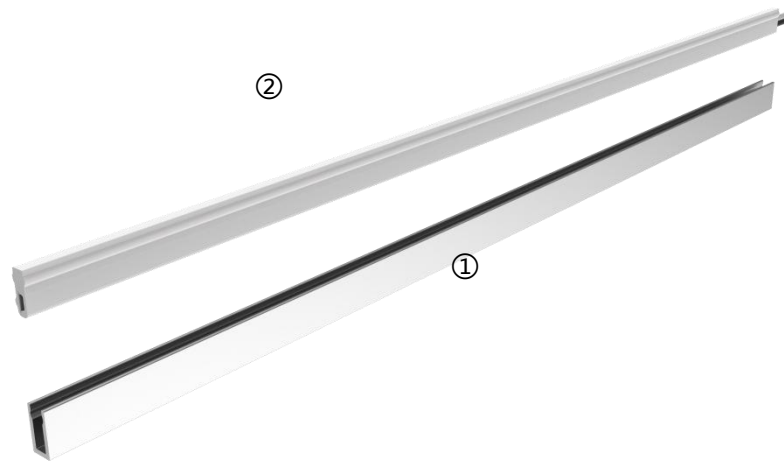

Standard Configuration




①Profile:

Installation : Recessed
 Material : AL6063-T5
 Applications: Indoors
 Profile weight : 0.116kg/2m
 Size : L2000*W5*H10mm
 Surface processing: Anodizing

Optional Accessories

Picture	Item	Size	Material	Amount
	End cap AS-NPS0409GH0-EC	L10*W4*H9mm	Silicone	End cap:10PCS End cap with hole:10PCS Glue:1PCS
	②Silicone neon strip NPS0409DW692405V		Material : silicone+FPC , CCT : 2700/3000/4000/5000/6000K ; CRI > 90 ; Voltage : 24V ; Power : 5W/m ; Lumen : 70Lm/m ; Size : 5000*3.8*9mm ; inimum cutting unit : 50mm ;	
	Power supply		Three-in-one dimming power (0-10V、 PWM、 resisitance) , size : 330*21*20mm , white , 25W	


NPS0409NW692405V Silicone neon strip parameter :

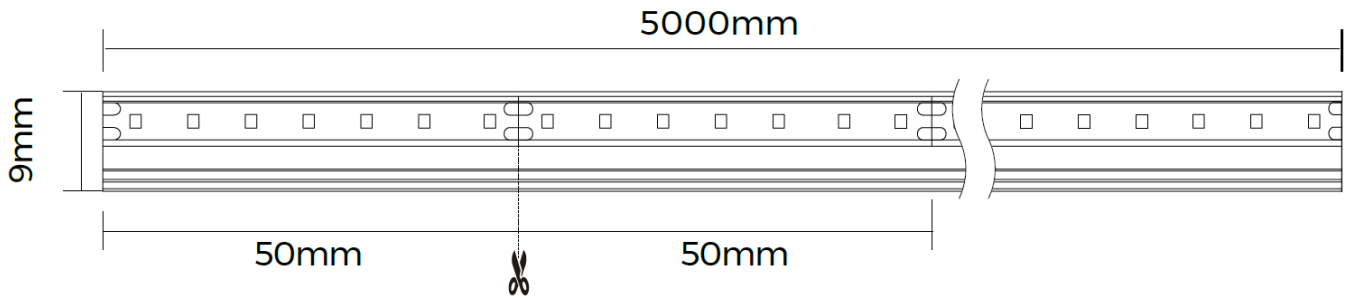

CCT	Lumen (LM/M)	Voltage (V)	Rated Power (W/M)	Max. Power (W/M)	CRI	Standard length (mm)	Minimum cutting unit (mm)
2700K	60	24	5.3	5.8	≥90	5000	50
3000K	65						
4000K	70						
5000K	75						
6000K	80						

Optical Parameter

NPS0409NW692405V light source, frosted diffuser

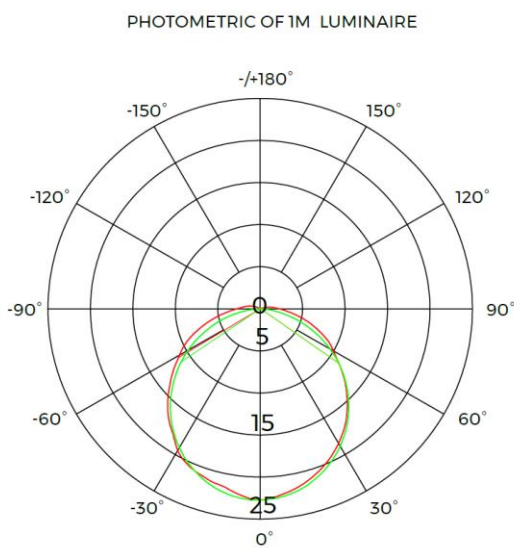

1m	6.630,22.39lx	288.32cm	
2m	1.658,5.598lx	576.64cm	
3m	0.7367,2.488lx	864.95cm	
5m	0.2652,0.8956lx	1441.59cm	
7m	0.1355,0.4569lx	2018.22cm	
Height	Eavg,Emax	Angle:110.50deg	Diameter