



# Specification

PRC 3360




## PRC 3360

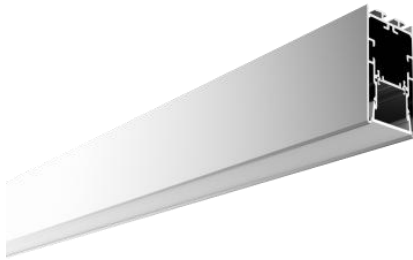


### Features

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver
- Specially designed light source with PC diffusers producing homogenous & soft lighting
- Super free connection: 180 ° extender, "L-", "T-" and "X-" type light corner
- Various installation ways: pendant, recessed, surface and wall mounted

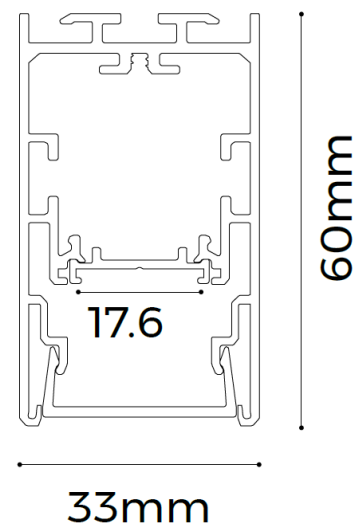

## Details

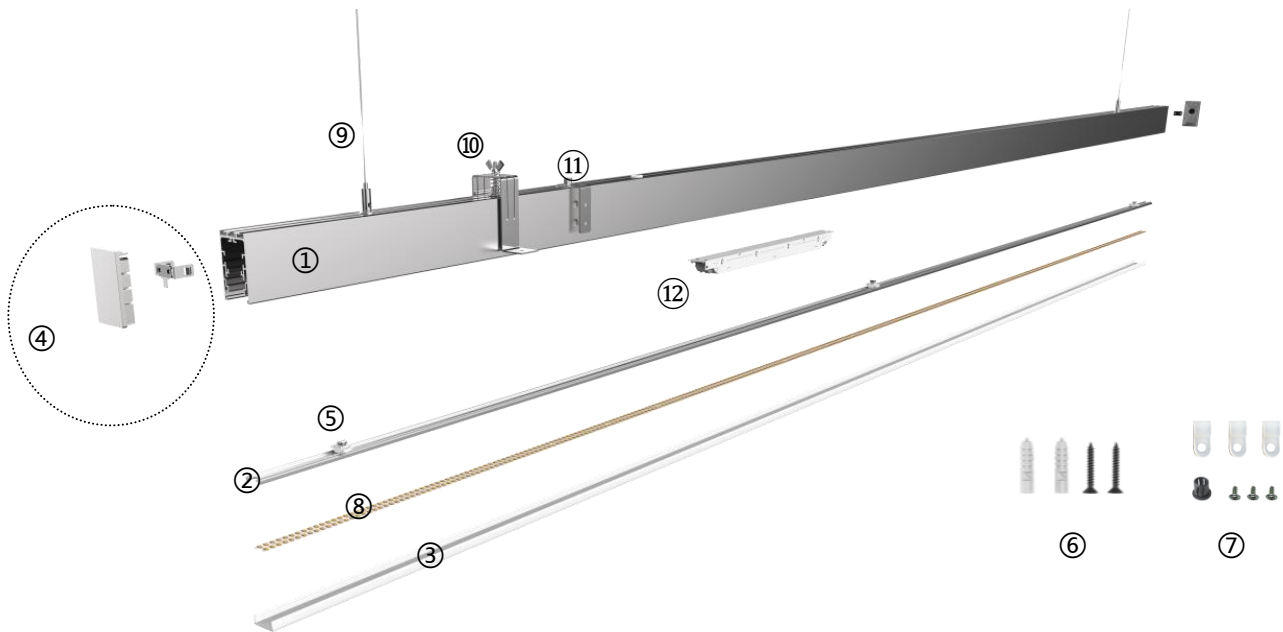

## Standard Configuration



### ①Profile ②Carrier:

Installation : Pendant/Recessed/Surface mounted/Wall mounted  
 Material: AL6063-T5  
 Applications: Indoors  
 Profile weight: 1.12kg/2.5m  
 Size: L2500\*W33\*H60mm  
 Surface processing: Anodizing



### ③Diffuser:

Type: Frosted diffuser  
 Material: PC  
 Light transmittance : 86%  
 Size : L2500\*W26.6\*H10.2mm  
 PC Feature : The diffuser will extend (shrink) 0.8mm/m when the temperature rises (drops) 10°C.



④End cap      L33\*W60\*H11.5mm      Fireproof PC& magnet



⑤Quick locker      L21.8\*W14\*H7.7mm      PA66










⑥Screw set      M3.5\*40mm      Carbon steel



⑦Cable clip

## Optional Accessories

	⑨Pendant cable with junction box	Steel cable D1.5*2000/4000mm	Junction box L80*W80*H30mm
	⑨Pendant cable without junction box	Steel cable D1.5*2000/4000mm	
	⑩Recessed buckle	L89*W25*H75mm	SPCC
	⑪Wall-mounted buckle	L50*W34*H18mm	SPCC
	⑫Power supply	ESD-V24-025S	330*21*20mm
	⑧Flexible strip D8280-24V-15mm	DC24V 20W/m width 15mm	Min. cutting unit 50mm
	⑧Rigid modular DY8280-24V-17mm	DC24V 20W/m width 17mm	Min. cutting unit 50mm

## Corners

L-type corner (L90-LS3360)




Al6063-T5&PC  
3.5W  
L100\*W100\*H60mm

L-type inner corner(L90N- LS3360)



Al6063-T5&PC  
2W  
L100\*W100\*H33mm

L-type exterior corner(L90W- LS3360)



Al6063-T5&PC  
4W  
L100\*W100\*H33mm

T-type corner(T90- LS3360)



Al6063-T5&PC  
4.5W  
L150\*W100\*H60mm

X-type corner(X90- LS3360)



Al6063-T5&PC  
5W  
L150\*W150\*H60mm

180° extender




SPCC  
silver  
L55\*W10\*H2mm

\* The corners can be provided with or without light source.

## Optical Parameter

D8280-24V-15mm light source, frosted diffuser

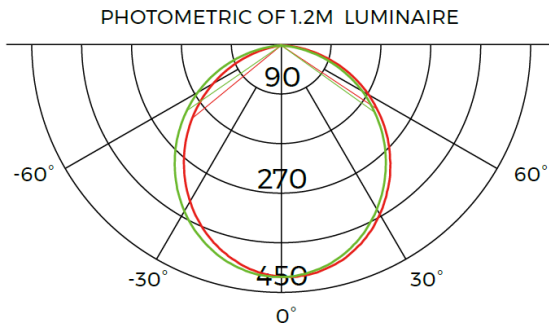

1m	137.8,427.9lx	270.43cm
2m	34.44,107.0lx	540.87cm
3m	15.31,47.54lx	811.30cm
5m	5.510,17.11lx	1352.17cm
7m	2.811,8.732lx	1893.04cm
Height	Eavg,Emax	Angle:107.03deg Diameter