



## LUMOFLEX

Lumoflex is a versatile range of silicone covered LED strip that offers unique 360° light distribution.

Latest technologies offers shadowless high light transmittance and uniform light distribution. Combined with a wide range of accessories, Lumoflex provides endless possibilities for any space.

### SPECIFICATION:

Power	14.4W/m
Input	24V DC
Operating Temperature	-20°C - +45°C
Lumen Output	900Lm/m
CRI	>90
Beam Angle	360°
Lifetime (reported)	36,000hrs to L70
Min bend radius	120mm
Bend Direction	any
Dimensions	Ø 25mm
Ingress Protection	IP65
Housing	Silicone sleeve extrusion moulding process, salt/UV/flame resistant
Cutting length	Can be cut at any point

### FEATURES AND BENEFITS:

- 360° uniform light distribution
- High light transmittance
- Flexibility – can be bend in any direction
- IP65 – protected from splashes of water
- UV and flame resistant
- Suitable for use around salt or chlorinated water

### APPLICATION:

- Indoor decorative lighting
- Exterior installation
- Architectural features
- Vertical, horizontal, circle

## PART NUMBERS

LMF01*	Lumoflex 3000K
LMF02*	Lumoflex 4000K

## ACCESSORIES

LMFECH Extra end caps with horizontal entry


LMFPCC Extra PC clips 25mm with screws



LMFHW1 1m Suspension power cable (side entry)  
+ 1m PC tube



LMFHW2 2.5m Suspension power cable (side entry)  
+ 2.5m PC tube



LMFHW2T 2.5m Suspension power cable (top entry)  
+ 2.5m PC tube




LMFSMC1 Surface mounted clip with electrical connection (side entry) + 1m PC tube

LMFSMC2 Surface mounted clip with electrical connection (top entry) + 2.5m PC tube

LMFSR 1pc 38mm PC tube+ suspension rod (0.3-0.6m)



LMFWS 2 pcs 2.5m wire+ 2 pcs 38mm PC tube





LMFC Connection ring



LMFTSMC Transparent surface mounted clips\*2



LMFSMT Surface mounting PC 1m tube

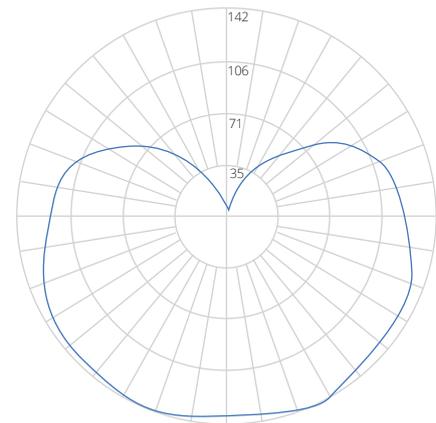

\* Comes with 2 clips / meter + end caps

