



## LOW POWER 4.8W LED STRIP


This low power LED strip is an ideal solution for ambient and feature lighting. Available in 12V or 24V and a variety of colour temperatures.

### FEATURES AND BENEFITS:

- Constant Voltage 12V DC or 24V DC input
- 3M double coated tape for quick installation
- CRI 90 as standard for better colour appearance
- Excellent heat dissipation
- Can be supplied in 5m reels or cut to size
- SDCM 3 for colour consistency
- IP65 option for humid locations

### APPLICATION:

- Indoor/Outdoor decorative lighting
- Feature lighting
- Shelf, under-cabinet and cove lighting

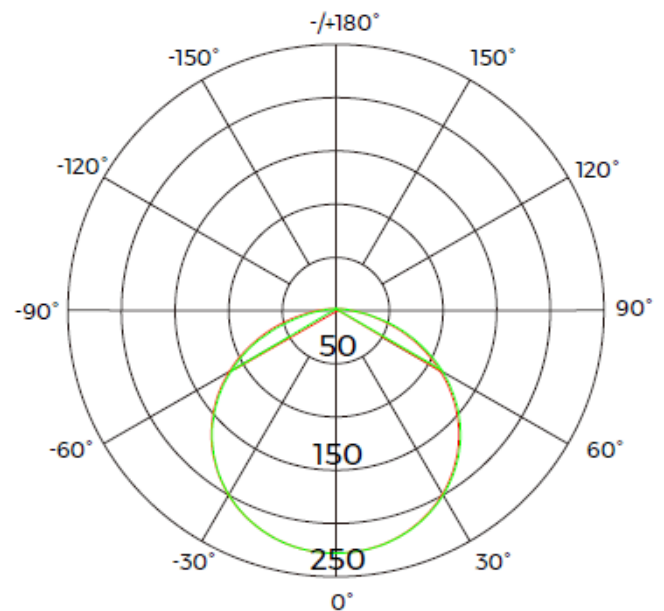

## SPECIFICATION:





### IP20

Item Code	STR001	STR003	STR005	STR007	STR002	STR004	STR006	STR008
-----------	--------	--------	--------	--------	--------	--------	--------	--------

### IP65

Item Code	STR011	STR013	STR015	STR017	STR012	STR014	STR016	STR018
Colour Temperature	2700K	3000K	4000K	6000K	2700K	3000K	4000K	6000K
Max. Power	4.8W							
Input	12V				24V			
CRI	CRI 90							
Cutting increment	50mm				100mm			
LED Pitch	16.66mm							
LED/m	60LEDs							
Width	8mm (IP20) / 10mm (IP65)							
Lumen Output	380lm	400lm	410lm	400lm	380lm	400lm	410lm	400lm
Beam Angle	120°							
Lifetime (rated)	36,000Hrs to L70							
Operating Temperature	-20°C - +40°C							
Warranty	5 years							

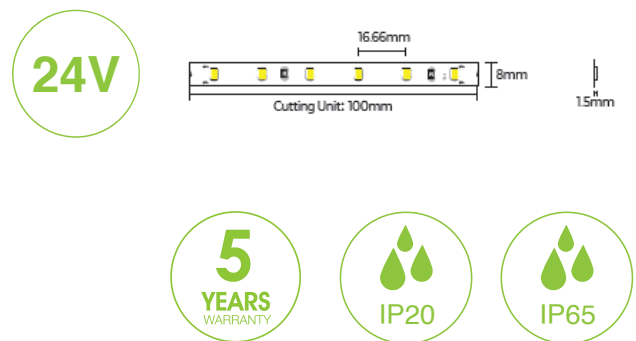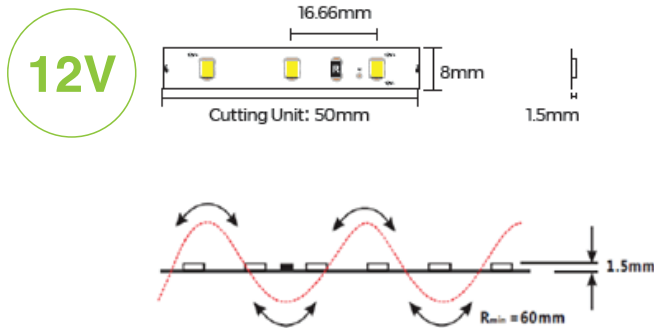

## RECOMMENDED DRIVERS (IP67):

### 12V

Power	Non-dimmable	0/1-10V / phase-dim / Potentiometer / PWM	DALI/Push dim
20W	ADR001	N/A	N/A
40W	ADR003	N/A	N/A
60W	ADR005	ADR005D	ADR005DA
100W	ADR007	ADR007D	ADR007DA
150W	ADR009	ADR009D	ADR009DA
200W	ADR011	ADR011D	ADR011DA
300W	ADR015	ADR015D	ADR015DA

### 24V

Power	Non-dimmable	0/1-10V / phase-dim / Potentiometer / PWM	DALI/Push dim
20W	ADR002	N/A	N/A
40W	ADR004	N/A	N/A
60W	ADR006	ADR006D	ADR006DA
100W	ADR008	ADR008D	ADR008DA
150W	ADR010	ADR010D	ADR010DA
200W	ADR012	ADR012D	ADR012DA
300W	ADR016	ADR016D	ADR016DA